

PAN-TILT CONTROLLER SYSTEM



WWW.VIVAKO.COM

WTX-2000




Features

- Recalls up to 255 cameras from one keyboard
- Multiple protocol supported in each channel
- Preset Position Control
- Variable manual control speed from 1°/sec to 90°/sec
- Built-in Graphic LCD monitor with blue screen
- User password support
- Easy upload programmed data via comm. Port of PC



Specifications

Model	WTX-2000
Keyboard Communication	Pan/Tilt interface : RS-485
	DVR innnnnterface : RS-485
	Pan/Tilt operating distance : 4000ft (1029m) on 24 AWG wire
Connector Type	RJ-11 6-pin modular
Keyboard Keypad	PC Keyboard button
	Numeric keypad and camera function keys
Joystick	Three-axis, vector solving, with twisting, return-to-center head
Input voltage	DC 12V \pm 2V
Power Consumption	Max. 450mA
LCD Display	Display 4-line \times 30-character
	Alphanumeric LCD display with blue backlight
Operating Temperature	-0°C ~ 45°C
Humidity	10% - 70% non-condensing
Weight	Approx 1.4Kg
Dimensions	372(W) \times 103(H) \times 145(D)mm

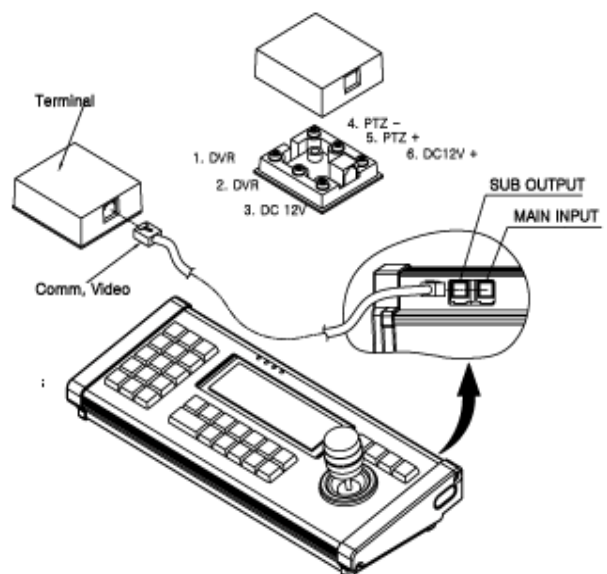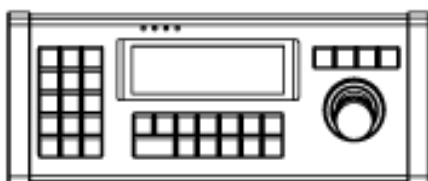

VIVAKOREA CO., LTD

#509, B-Dong, Woorim Lions Valley, 425, Cheongcheon-Dong, Bupyong-Gu, Incheon City, R.O. Korea
Tel : 82 - 32 - 623 - 6099 / Fax : 82 - 32 - 623 - 6098